
Adhesin



Complete Protein Adhesive Range for the Graphic Arts Industry

Your Benefits

- Complete product range for all substrates and binding methods
- High speed for all climate zones
- Clean machinability
- Perfect flat layout

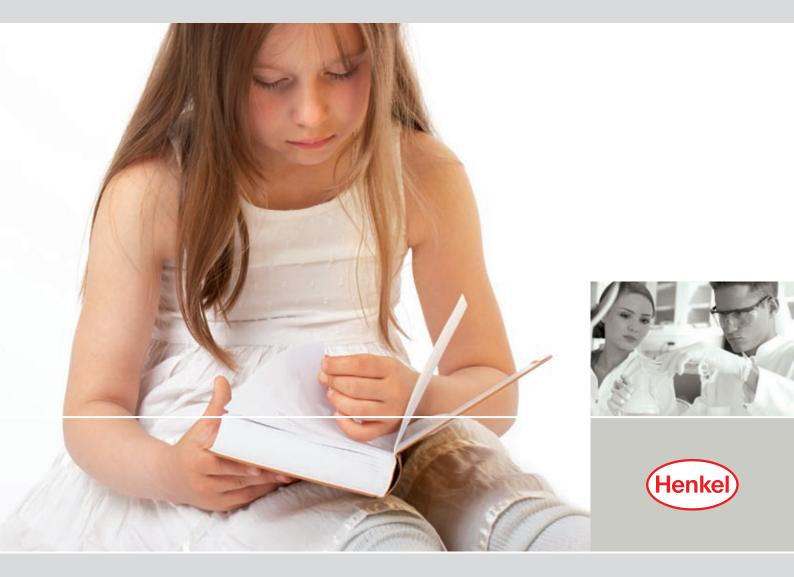







Adhesin® Gel

	Viscosity at 60 °C mPas	Open time	RF value %	Application information
Adhesin [®] Gel 6640	2200	short	57	Casemaking high speed (e.g. Hörauf, Kolbus, Müller Martini), normal climate
Adhesin [®] Gel 6641	1800	short	48	Casemaking high speed specially suited for Kolbus Strato or DA 85
Adhesin [®] Gel 6642	2650	short	53	Casemaking high speed (e.g. Hörauf, Kolbus, Müller Martini), normal climate
Adhesin® Gel 6602	2650	short	52	Casemaking medium speed
Adhesin [®] Gel 1880	8 000	medium	68	Very flexible backlining Excellent stability of rounding
Adhesin [®] Gel 1330	8 000	long	61	Backlining, initial tack is very high (e.g. Kolbus, Müller Martini)
Adhesin [®] Gel 6531	1100	medium	58	File making and box covering work low speed (e.g. Emmeci, Crathern), hand made paper conversion, normal climate
Adhesin [®] Gel 6535	950	long	62	File making and box covering work low speed (e.g. Emmeci, Crathern), hand made paper conversion, normal climate

Elements of Value

For information about our comprehensive service offering and how it can really help your business – please refer to our documents about Service, Process and Design opportunities or contact your local Henkel sales representative.



Contact

Henkel AG & Co. KGaA

40191 Düsseldorf, Germany
Phone +49 (0)211 797-6938
Fax +49 (0)211 798-4008
E-mail graphicarts@henkel.com

www.henkel.com